



旋转展示架组装说明

Rotatable Product Display Stand Assembly Instructions


ROXTONE

产品型号: TDS4

Item No.: TDS4

产品特点 | Features

- 360°旋转展示
- 360° Rotatable Display
- 模块化可拆卸结构
- Modular & Detachable Structure
- 经销商与零售展示方案
- Dealer & Retail Display Solution
- 提升产品展示效果
- Enhanced Product Presentation

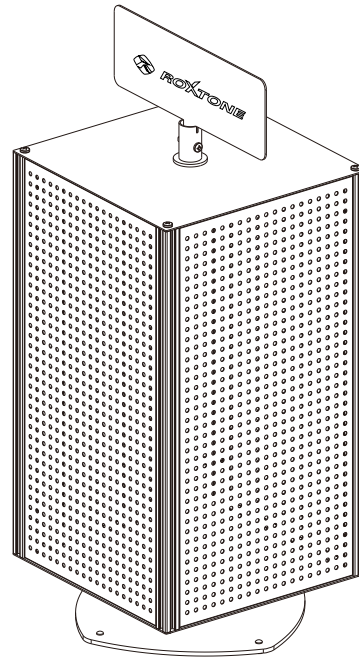

一. 配件清单 Package Contents

安装须知

安装前请核对物料清单, 确认配件齐全无损坏, 锁紧螺母时力度适中, 避免滑牙或型材变形. 请在平整稳固的台面组装与使用, 旋转展示时请勿用力过猛。

Installation Notes


Please check all components against the package contents before assembly and ensure nothing is missing or damaged. Tighten all nuts with moderate force to avoid thread damage or profile deformation. Assemble and use the display stand on a flat and stable surface. Do not rotate the display stand with excessive force.




T型螺栓 x16
T-bolts x16




展示牌固定螺栓 x1
Sign Mounting Bolt x1




圆柱轴固定销 x1
Shaft Locking Pin x1



螺母扳手 x1
Wrench x1



内六角扳手 x1
Hex Key x1

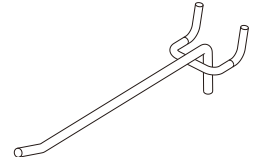

挂钩 x16
Display Hooks x16



法兰螺母 x16
Flange Nuts x16




展示牌固定螺母 x1
Sign Mounting Nut x1




展示架盖板螺丝 x8
Cover Plate Screws x8




展示架轴套 x2
Shaft Bushings x2




品牌展示牌 x1
Brand Sign x1

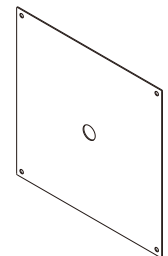


展示架盖板 x2
Cover Plates x2

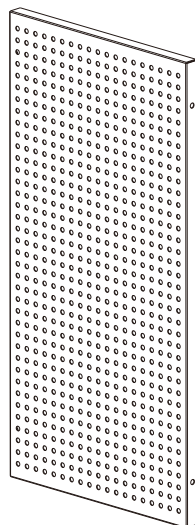


展示架洞洞板 x4
Pegboard Panels x4

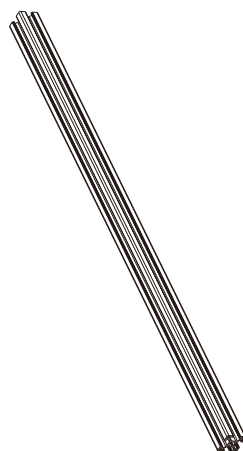

展示架角立柱 x4
Aluminum Corner Profiles x4

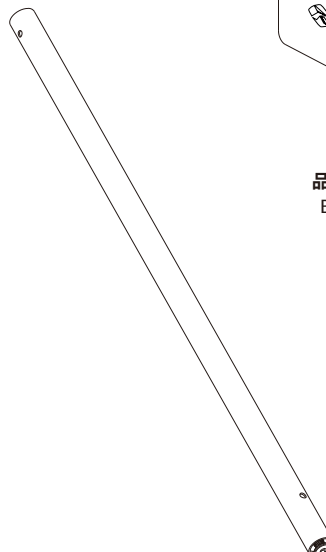

展示架圆柱轴 x1 (预安装底座螺丝)
Center Pivot Shaft x1
(Base Screw Pre-installed)

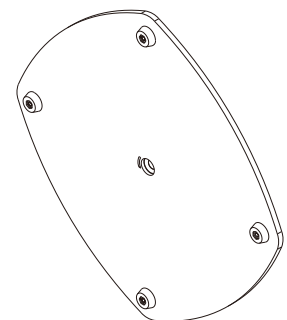


展示架底座 x1
Base Plate x1

1. 预装紧固件

取1块展示架洞洞板, 将T型螺栓从外侧穿入洞洞板两侧的对孔位, 内侧拧上法兰螺母, 暂不完全锁紧(预留调整余量)。每块洞洞板两侧各预装2组螺栓螺母。按相同方法完成其余3块洞洞板。

Step 1. Pre-install Fasteners

Take one pegboard panel. Insert the T-bolts into the designated holes from the outside and thread the flange nuts onto the bolts from the inside without fully tightening them, leaving room for adjustment. Pre-install two sets of T-bolts and flange nuts on each side of the panel. Repeat the same procedure for the remaining three panels.

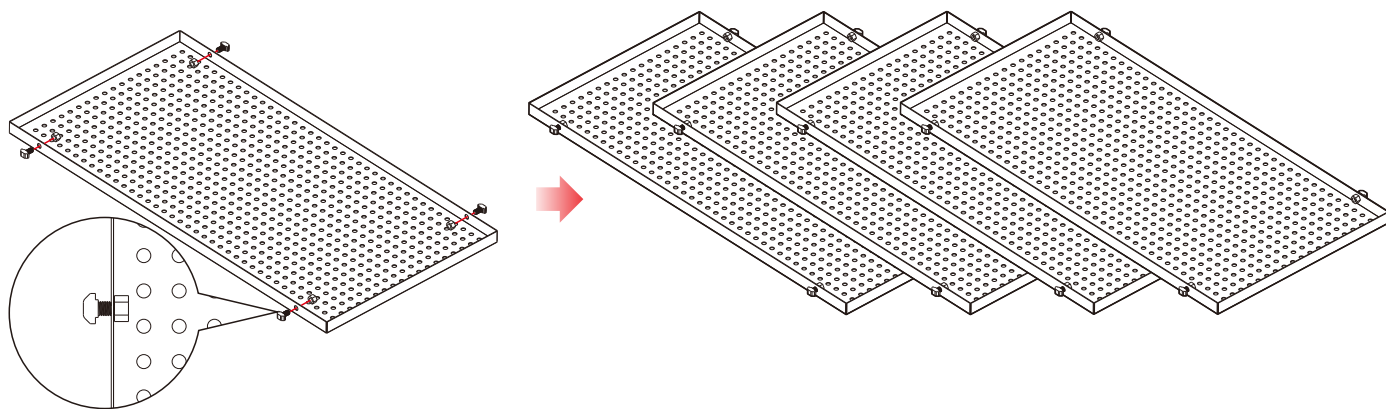


2. 组装洞洞板角立柱总成

将预装螺栓的洞洞板与1根展示架角立柱对齐, 旋转T型螺栓使螺栓头部卡入角立柱的型材槽内, 确认位置无误后, 用扳手锁紧法兰螺母, 完成1组洞洞板角立柱总成。按相同方法完成其余3组总成。

Step 2. Assemble the Panel and Corner Profile

Align one pre-assembled pegboard panel with one aluminum corner profile. Rotate each T-bolt until the bolt head engages securely in the profile slot. After confirming the correct position, tighten the flange nuts using the wrench. Repeat for the remaining three assemblies.

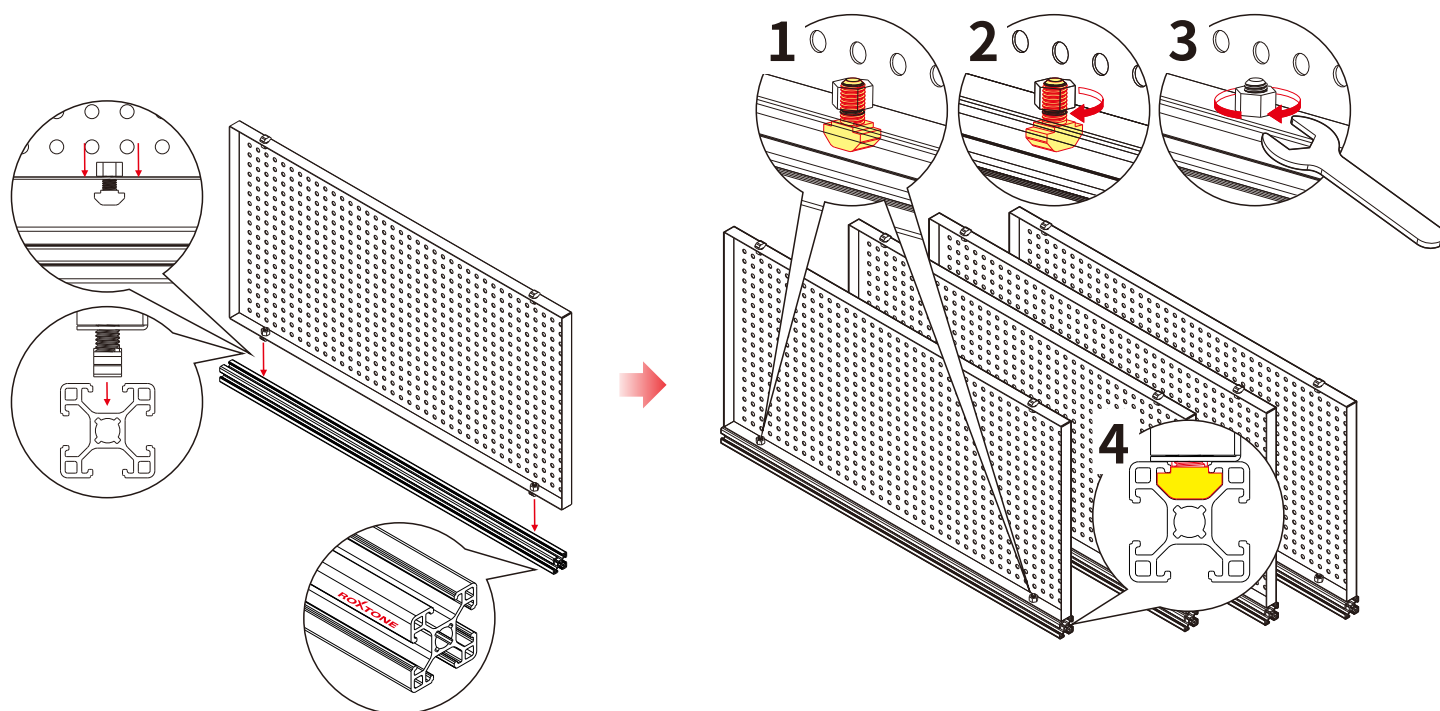


3. 组装展示架主体框架

取 4 组洞洞板角立柱总成依次围合拼接：将第一组总成的洞洞板自由边，对准第二组总成的角立柱型材槽，通过预装的T 型螺栓连接，参照步骤 2 的方法锁紧螺母。按此方式依次拼接 4 组成品，最终形成封闭的展示架主体框架。

Step 3. Assemble the Main Display Frame

Join the four panel assemblies together one by one. Align the free edge of one panel assembly with the slot of the next corner profile. Secure them using the pre-installed T-bolts and tighten the nuts following Step 2. Continue until the enclosed display frame is completed.

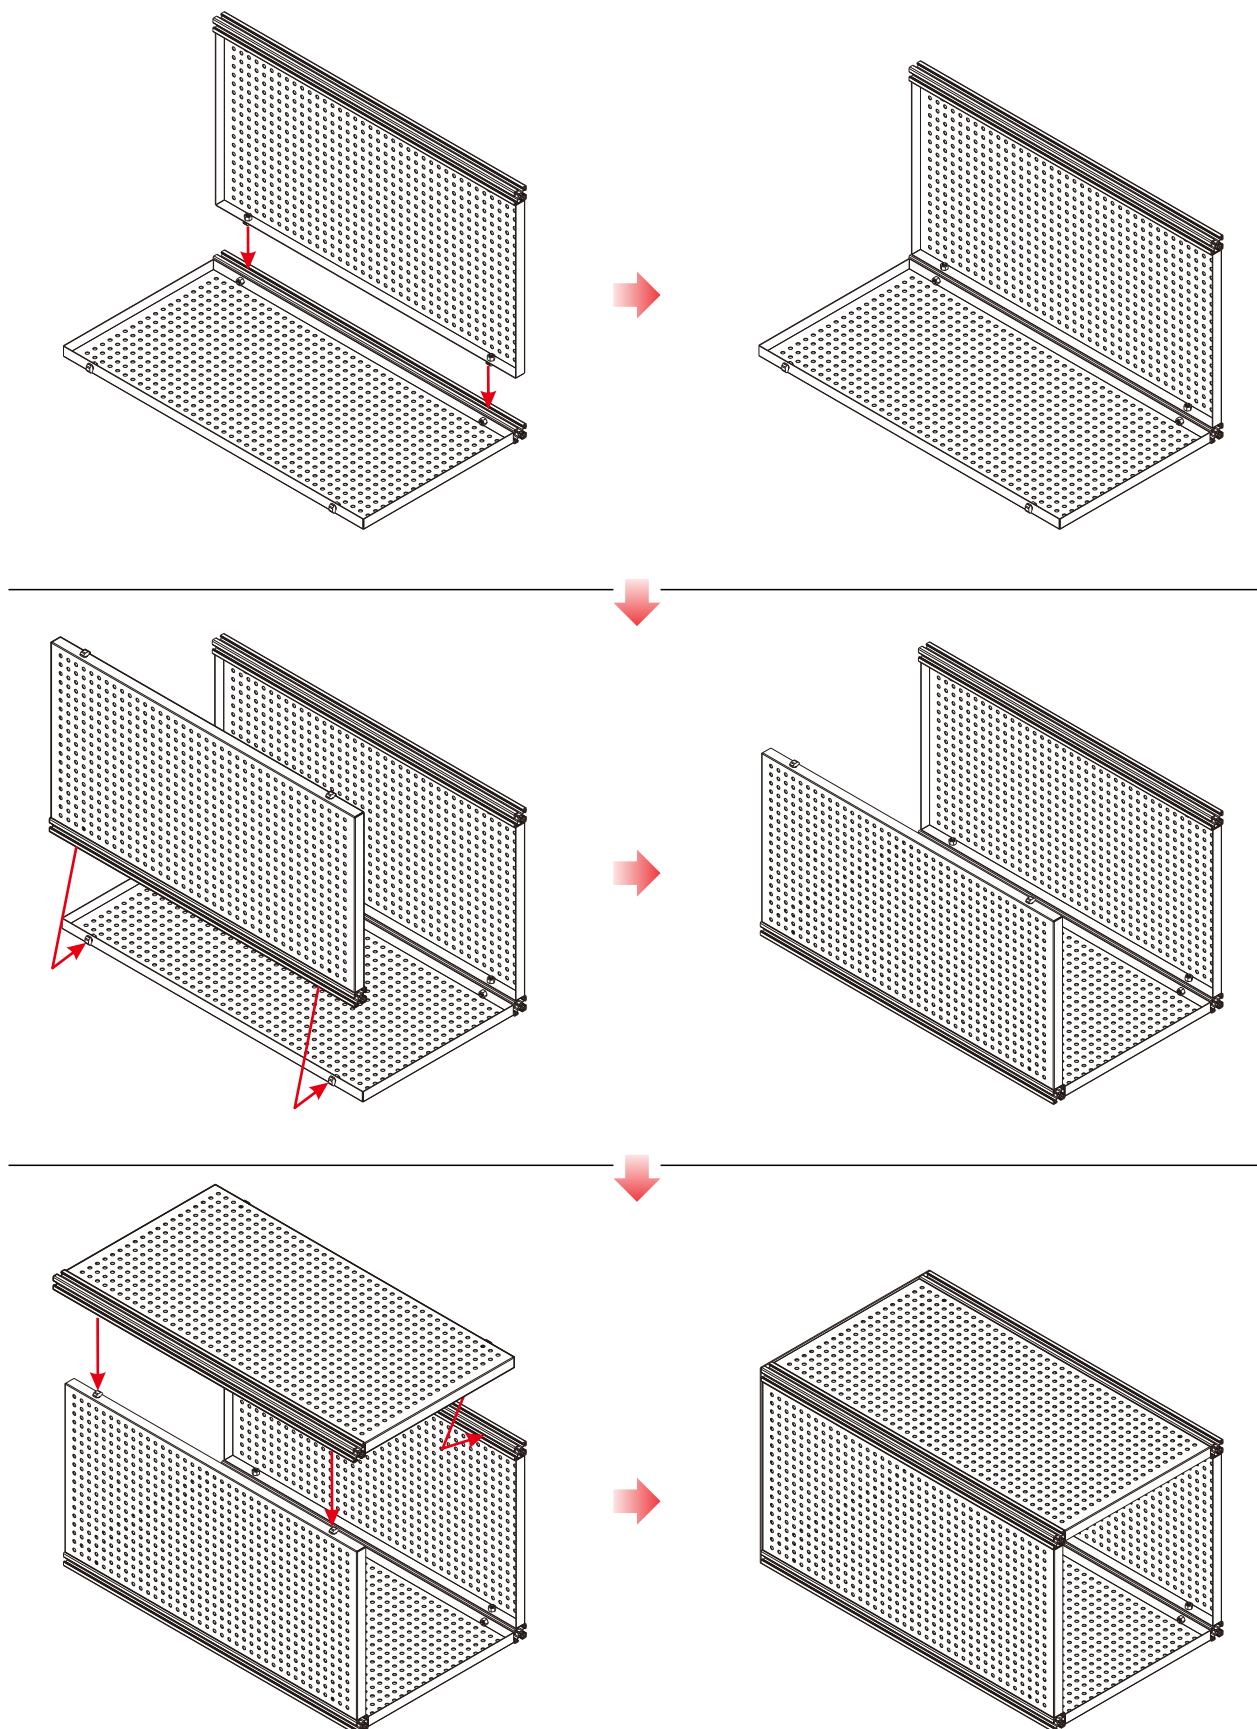


4.安装底部盖板与底部轴套

将展示架主体竖直放置，取 1 块展示架盖板对准主体底部，用盖板螺丝将盖板与 4 根角立柱底端固定；再将底部轴套装入底部盖板的中心孔中。

Step 4. Install the Bottom Cover Plate and Bottom Shaft Bushing

Stand the display frame upright. Position the bottom cover plate and fasten it with the cover plate screws. Insert the bottom shaft bushing into the center hole of the cover plate.

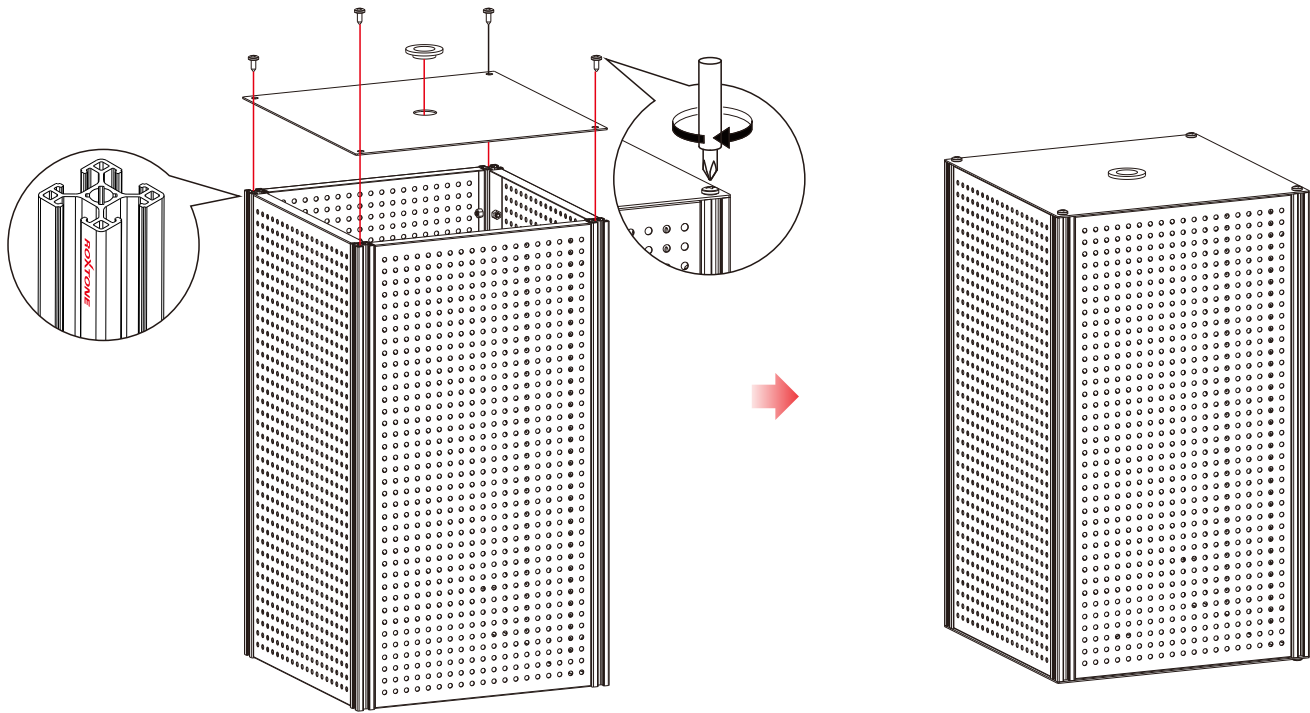


5.安装顶部盖板

扶住展示架主体缓慢翻转，使底部朝下、顶部朝上；取另 1 块展示架盖板对准主体顶部，用盖板螺丝与 4 根角立柱顶端固定。

Step 5. Install the Top Cover Plate

Carefully turn the display frame over so the bottom faces downward. Position the top cover plate and secure it with the cover plate screws.

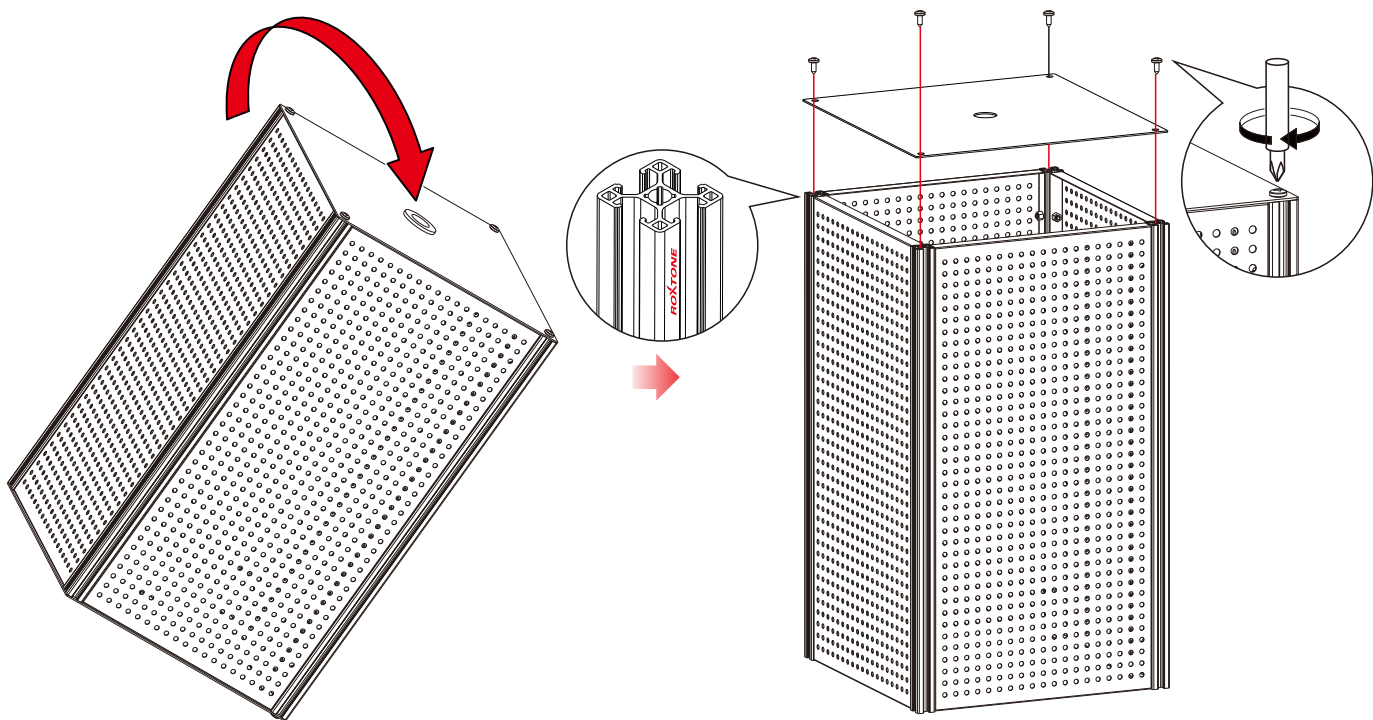


6. 组装底座总成

取出预装有底座螺丝的展示架圆柱轴，先旋下底部的底座螺丝；将圆柱轴对准展示架底座的中心孔穿入，再将底座螺丝从底盘下方旋回圆柱轴底端并锁紧。最后将固定销装入对应孔位，完成底座总装。

Step 6. Assemble the Base

Remove the pre-installed base screw from the center pivot shaft. Insert the center pivot shaft through the center hole of the base plate. Reinstall and tighten the base screw from the underside of the base. Insert the locking pin to complete the base assembly.


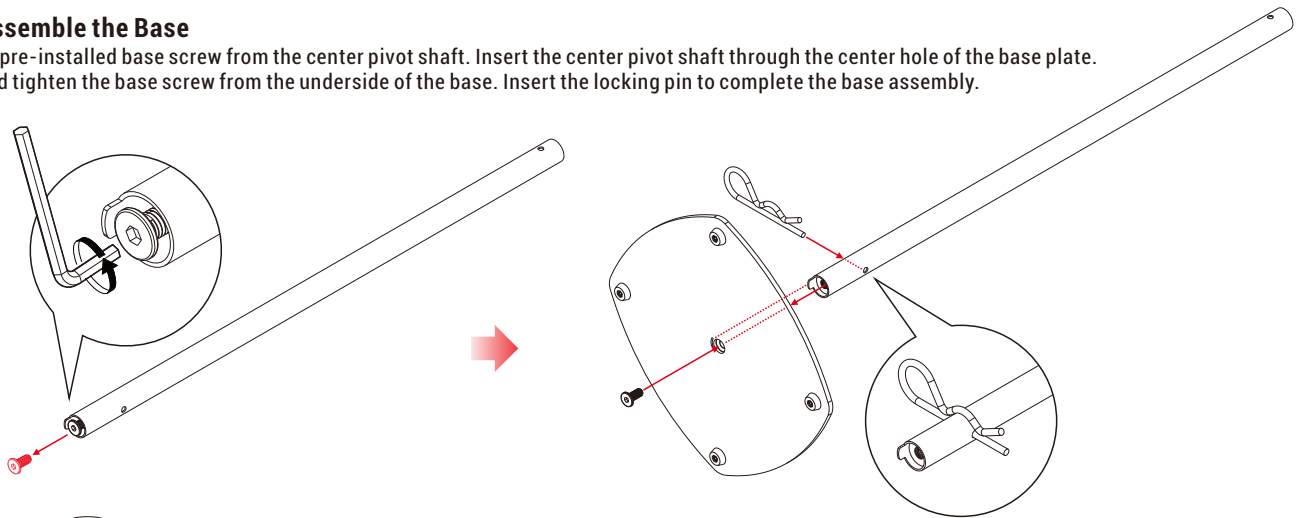


7. 主体与底座总成与顶部轴套装配

装配将展示架主体底部的轴套对准底座总成的圆柱轴，缓慢垂直套入，再将顶部轴套装入顶部盖板的中心孔中，确保主体可 360° 顺畅旋转。

Step 7. Assemble the Display Frame onto the Base

Align the bottom shaft bushing with the center pivot shaft. Carefully lower the display frame vertically onto the shaft. Install the top shaft bushing into the center hole of the top cover plate. Ensure the display stand rotates smoothly through 360°.

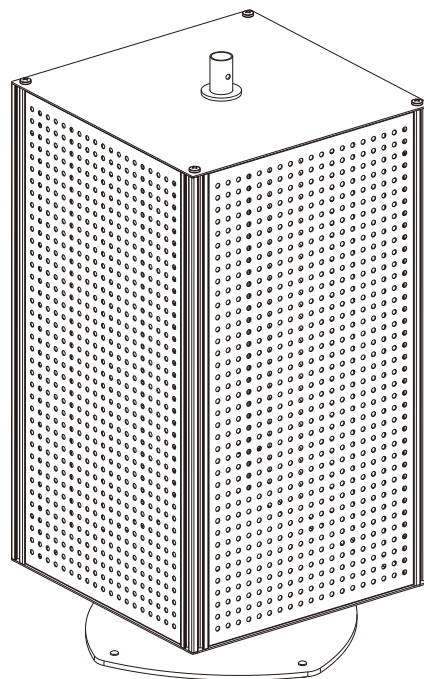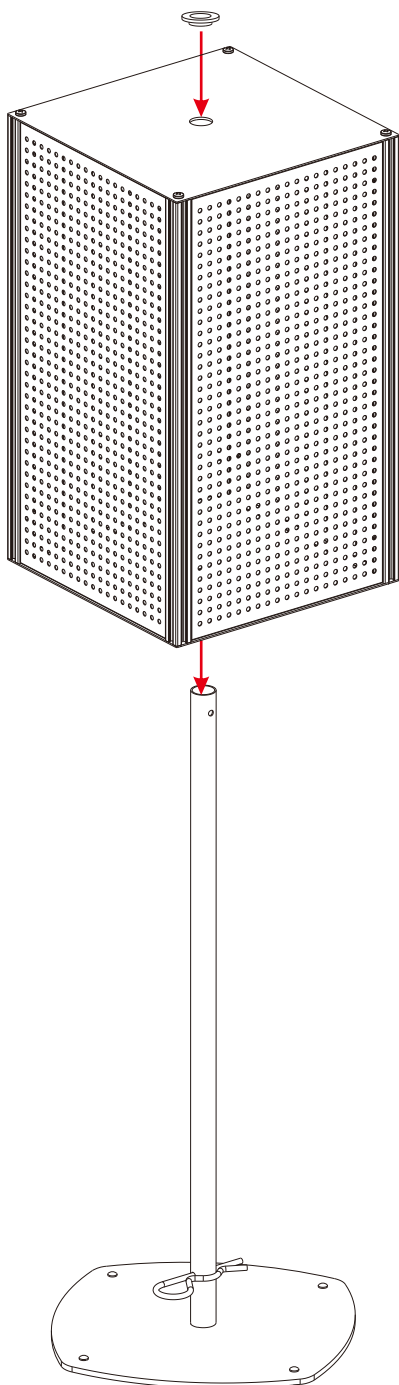


8.预装品牌展示牌

将品牌展示牌的底座对准圆柱轴顶端插入，使展示牌底座与圆柱轴的螺丝孔位对齐。

Step 8. Install the Brand Sign

Insert the mounting bracket of the brand sign into the top of the center pivot shaft.
Align the mounting holes.

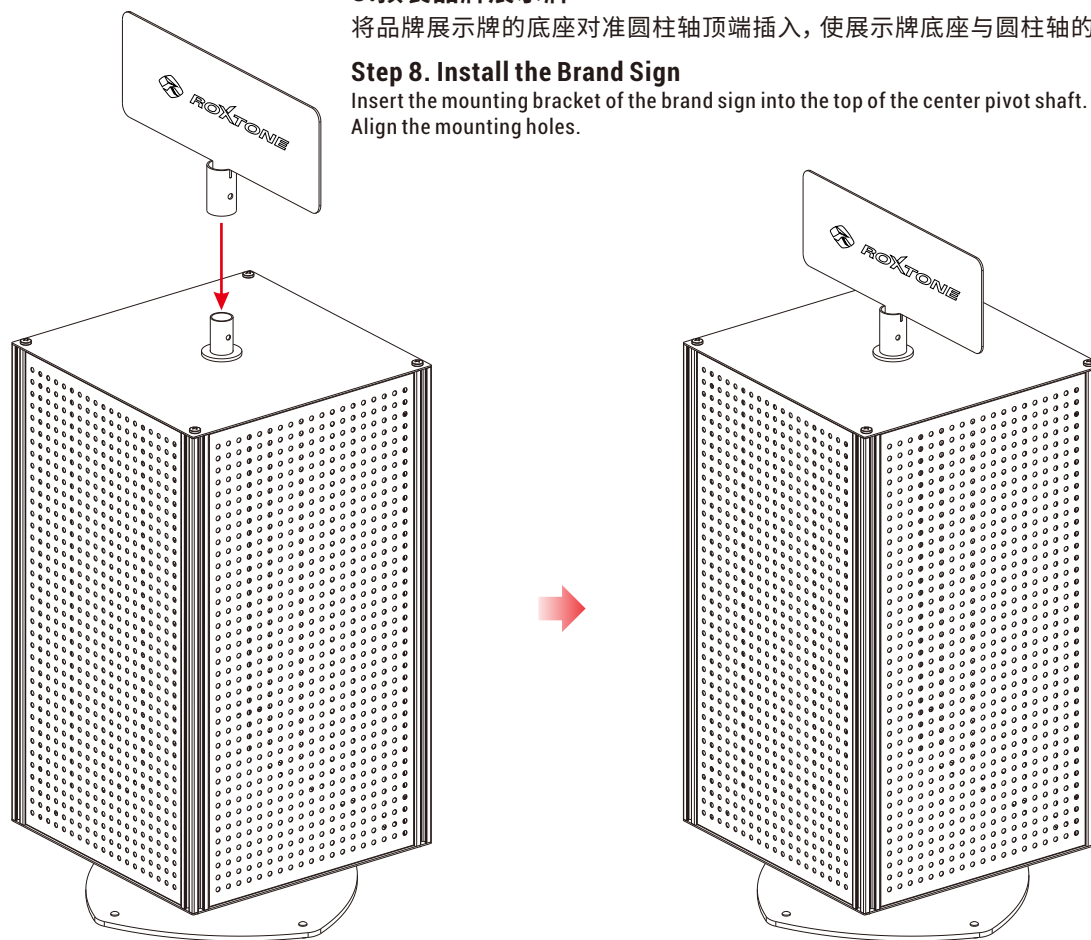

9.锁紧固定展示牌

将展示牌螺栓穿入对齐的孔位，内侧拧上螺母并锁紧，完成全部安装。

Step 9. Secure the Brand Sign

Insert the mounting bolt through the aligned holes. Install the mounting nut from the inside and tighten securely. Assembly is now complete.

